



(43) International Publication Date
29 January 2004 (29.01.2004)

PCT

10/521869
(10) International Publication Number
WO 2004/010757 A1

(51) International Patent Classification⁷: H05K 7/14

(74) Agent: LEE, Joong-Seop; Lawin Tower 301, 1497-1,
Geoje-1dong, Yeonje-gu, Pusan 611-071 (KR).

(21) International Application Number:
PCT/KR2002/001693

(22) International Filing Date:
7 September 2002 (07.09.2002)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
2002/22117 U 24 July 2002 (24.07.2002) KR

(71) Applicant (for all designated States except US): LATCH
WON CO., LTD. [KR/KR]; 504-17, Kamjeon-Dong,
Sasang-Ku, Pusan 617-050 (KR).


(81) Designated States (*national*): AE, AG, AL, AU, BA, BB,
BG, BR, BZ, CA, CN, CO, CR, CU, CZ, DM, DZ, EE, GE,
HR, HU, ID, IL, IN, IS, JP, KP, LC, LK, LR, LT, LV, MG,
MK, MN, MX, MZ, NO, NZ, PL, RO, SG, SI, SK, SL, TR,
TZ, UA, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FIXING RAIL OF TERMINAL BLOCK FOR ELECTRIC/ELECTRONIC COMPONENTS

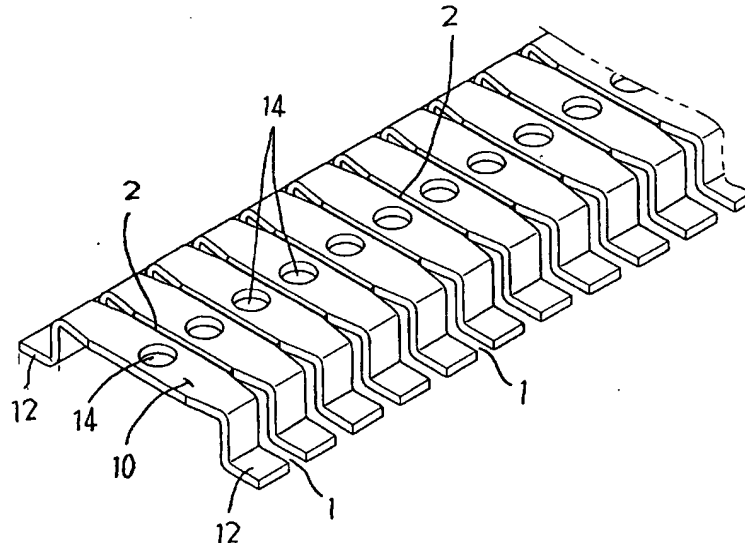

(57) Abstract: Disclosed is a fixing rail of a terminal block capable of easily assembling various electric/electronic components. Electric/electronic devices and so forth in a control box, and facilitating the maintenance thereof, as well as the easy movement thereof. The fixing rail of a terminal block includes wings (12) extended from both sides of a C-shaped body (10), with a plurality of bodies arranged in a row, the respective bodies (10) provided at a center thereof with a hole (14), and a plurality of holes (14) formed at the bodies being spaced apart from each other at regular intervals. The fixing rail comprises a cutting groove (2) formed between the bodies, the cutting groove (2) provided at upper and lower portions of the body (10); and a gap (1) formed between ends of the wings (12), such that the fixing rail may be cut by a desired length using a hand or nipper, without using a cutter or a saw.